
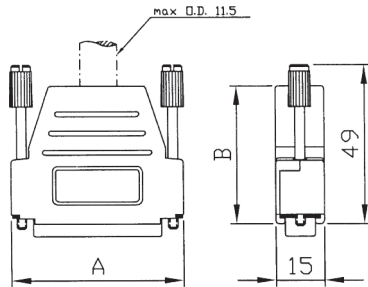


## TECHNICAL SPECIFICATIONS

- Material:** Polyamid UL-recognised
- Operating Temperature:** -55°C to +110°C
- Cable Entry:** Side and Top  
Side Only  
Top Only
- Thumbscrews:** UNC 4-40 (standard)  
M2,5 or M3,0 upon request
- Cable Diameter:** Up to 11,5 mm
- Colour:** Black
- Accessories:** See page 120
- Assembly Instruction:** See page 145

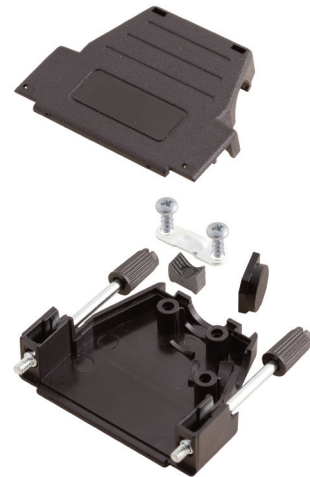

Size DSSK-T/P	Dim A	Dim B	Dim B
9-way	31,5	40,0	43,0*
15-way	40,0	40,0	-
25-way	53,5	43,0	-
37-way	71,3	40,0	-

\* Top only

## Features:

- Available in sizes 9-15-25-37
- Suitable for any common Sub-D connector
- Quick-snap locking system
- Re-openable
- Company logo available upon request
- Also available in Metalized Version, See page 13

L = Side + Top Entry  
S = Side Entry  
T = Top Entry

## Ordering information:

Size:	P/N - Kitted:	Product Code:	L
9-way	6260-0107-01	MHDSSK-P-09-L-K	
15-way	6260-0107-02	MHDSSK-P-15-L-K	
25-way	6260-0107-03	MHDSSK-P-25-L-K	

Size:	P/N - BULK:	Product Code:	L
9-way	6261-0107-01	MHDSSK-P-09-L	
15-way	6261-0107-02	MHDSSK-P-15-L	
25-way	6261-0107-03	MHDSSK-P-25-L	

Size:	P/N - Kitted:	Product Code:	S
9-way	6260-0107-11	MHDSSK-P-09-S-K	
15-way	6260-0107-12	MHDSSK-P-15-S-K	
25-way	6260-0107-13	MHDSSK-P-25-S-K	
37-way	6260-0107-14	MHDSSK-P-37-S-K	

Size:	P/N - BULK:	Product Code:	S
9-way	6261-0107-11	MHDSSK-P-09-S	
15-way	6261-0107-12	MHDSSK-P-15-S	
25-way	6261-0107-13	MHDSSK-P-25-S	
37-way	6261-0107-14	MHDSSK-P-37-S	

Size:	P/N - Kitted:	Product Code:	T
9-way	6260-0107-21	MHDSSK-P-09-T-K	
15-way	6260-0107-22	MHDSSK-P-15-T-K	
25-way	6260-0107-23	MHDSSK-P-25-T-K	

Size:	P/N - BULK:	Product Code:	T
9-way	6261-0107-21	MHDSSK-P-09-T	
15-way	6261-0107-22	MHDSSK-P-15-T	
25-way	6261-0107-23	MHDSSK-P-25-T	