

TECHNICAL SPECIFICATIONS

Material:

Plastic Hood: Polyamid - UL-recognised
 Metal Hood: Steel, Zinc plated

Operating Temperature: -55°C to +110°C

Thumbscrews: UNC 4-40 (Standard)
 M2,5 or M3 on request

Cable Entry: Top Entry

Cable O.D.: Up to 11,5mm


Accessories: See page 186-190

Assembly Instruction: See page 202-203



Features:

- Available in sizes 9-15-25-37
- Suitable for IDC connectors
- Quick-Snap locking system
- Crimping method ensures a 360° shielding

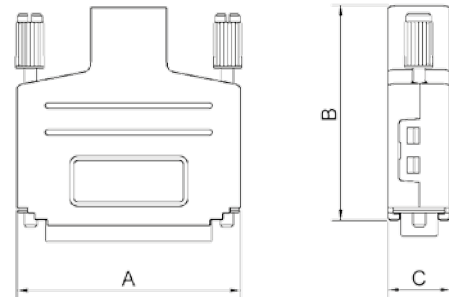

Ordering information:

Size:	P/N - Kitted:	Product Code:
9-way	6260-0120-xx	DTK09I-[size] + DTPK09I-JS
15-way	6260-0121-xx	DTK15I-[size] + DTPK15I-JS
25-way	6260-0122-xx	DTK25I-[size] + DTPK25I-JS
37-way	6260-0123-xx	DTK37I-[size] + DTPK37I-JS

Size DTK/DTPK	Dim A	Dim B	Dim C
9-way	35,0	54,0	19,0
15-way	43,0	54,0	19,0
25-way	54,0	53,0	18,0
37-way	74,0	54,0	19,0

Code for correct ferrule:

Standard Crimp

Example: 6260-0120-01
 DTK09I-R5,3 + DTPK09I-JS

Cable O.D	Size	Order Code xx	Suits Hood size
Up to 7 mm	5,3	-01	9-15-25-37
6,8–8,6 mm	6,0	-02	9-15-25-37
8,4–9,8 mm	7,0	-03	9-15-25-37
9,6–10,3 mm	7,5	-04	9-15-25-37
10,1–11,0 mm	8,6	-05	9-15-25-37
10,8–12,5 mm	10,5	-07	9-15-25-37

Reversed Crimp

Example: 6260-0120-10
 DTK09I-R5,3 + DTPK09I-JS

Cable O.D	Size	Order Code xx	Suits Hood size
Up to 5,1 mm	R5,3	-10	9-15-25-37
4,3–6,9 mm	R7,1	-12	9-15-25-37
6,1–8,8 mm	R9,0	-14	9-15-25-37
8,0–10,3 mm	R10,5	-15	9-15-25-37
9,5–11,5 mm	R11,7	-16	9-15-25-37