

MHDM-Series – Machined Pins, Solder

Available in sizes 9, 15, 25, 37



Features:

- Available in Crimp version on request
- Available in PCB-mount version on request
- Available in High Density version on request


Order Code

	MHDM	XX	-	SP
Series: _____				
Size (xx): 9, 15, 25, 37 _____				
SP: Male _____				
SS: Female _____				

MHDF2-Series – Economy IDC's

TECHNICAL SPECIFICATIONS

- Contact Current Rating:** 1 Amp
- Contact Resistance:** 15mOhm max.
- Operating Temperature:** -55°C to +105°C
- Dielectric Withstand:** AC 500V min.
- Insulation Resistance:** 1000MOhm min.
- Contacts:** Phosphor Bronze
- Insulators:** Glass filled Polyester
- Plating:** Gold over Nickel
- Wire Size:** AWG 26 or 28
1,27 mm Conductor Center,
Flat Cable

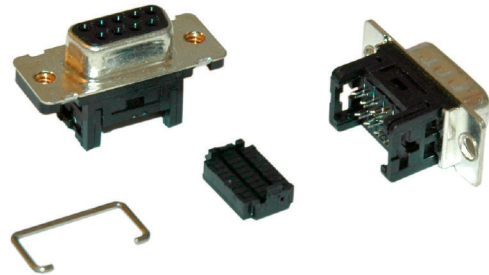

Order Code

	MHDF2	-	XX	-	SP	-	TM
Series: _____							
Size (xx): 9,15, 25, 37 _____							
SP: Male _____							
SS: Female _____							
TM: UNC 4-40 Clinch Nuts _____							
SM: Through Hole _____							