

TECHNICAL SPECIFICATIONS

Material:

Connector Housing: Glass-Filled TP
UL94 V-0 Class

Contacts: Phosphor, Bronze
Gold-Flash

Shell: Zinc Alloy, Ni-plated

Electrical Specifications:

Voltage Rating: 500 V AC R.M.S.

Current Rating: 1,5 Amp

Insulation Resistance: 1000 MΩ Min.


Contact Resistance: 20 mΩ Max. (Initial)

Operating Temperature: -20°C to +85°C



Female Connector

- Suitable for Cable and Hood Mounting

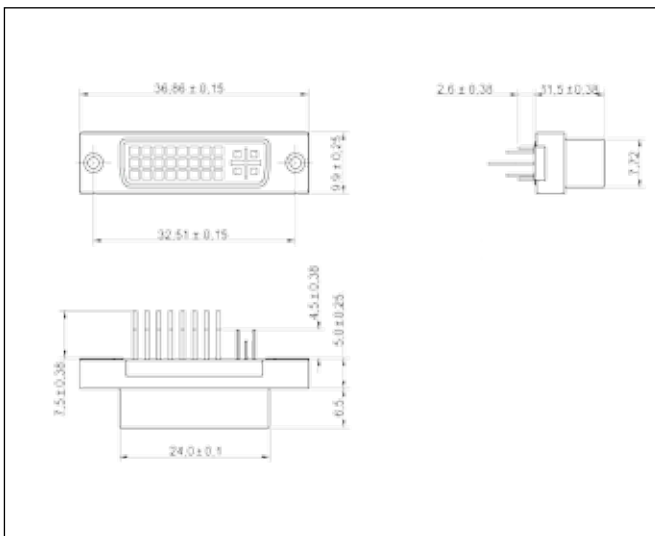

Ordering information:

Size/Type:	Part Number:	Product Code:
17-pin Analog	3401-0101-11	On request
19-pin Digital-S	3401-0101-12	On request
23-pin A/D	3401-0101-13	On request
25-pin Digital-D	3401-0101-14	MHDVI-25-FCD
29-pin A/D	3401-0101-15	MHDVI-29-FCAD

Standard parts are 25 and 29 pins
17, 19 and 23 pins are available on request.

The female MHDVI connector suit Shielded Hood
MHDVI-CF found on page 115.