

DIN41612 - Type B

Two Row Body


Features:

16 to 64 Male or Female connector

Right Angled Dip-Solder, Wire Wrap,
Straight Dip-Solder, Press-Fit

Selective Gold in contact Area
Tin Plated in termination Area

Pintail Cross section 0,60-0,50 or 0,86-0,73
Also at 0,86-0,70 on request (Wire-Wrap)

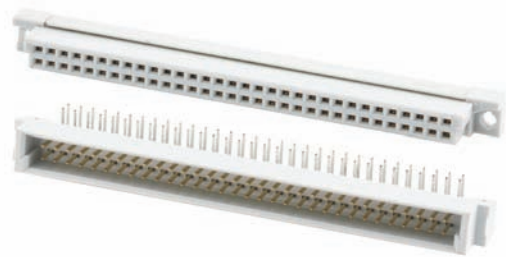

Commonly Ordered Parts:

Pins / Gender	Typ.	Arrangement:	Pintail Length:	Style:	Part No:
16 / Male	B/2	16 a,b (even)	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-2111-11
16 / Female	B/2	16 a,b (even)	5,0 - 4,0 mm	Dip Solder Straight	2810-2113-14
32 / Male	B/2	32 a,b	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-2121-01
32 / Female	B/2	32 a,b	5,0 - 4,0 mm	Dip Solder Straight	2810-2123-04
32 / Male	B	32 a,b (even)	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-0121-11
32 / Female	B	32 a,b (even)	5,0 - 4,0 mm	Dip Solder Straight	2810-0123-14
64 / Male	B	64 a,b	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-0141-01
64 / Female	B	64 a,b	5,0 - 4,0 mm	Dip Solder Straight	2810-0143-04

DIN41612 - Type C

Three Row Body


Features:

16 to 64 Male or Female connector

Right Angled Dip-Solder, Wire Wrap,
Straight Dip-Solder, Press-Fit

Selective Gold in contact Area
Tin Plated in termination Area

Pintail Cross section 0,60-0,50 or 0,86-0,73
Also at 0,86-0,70 on request (Wire-Wrap)

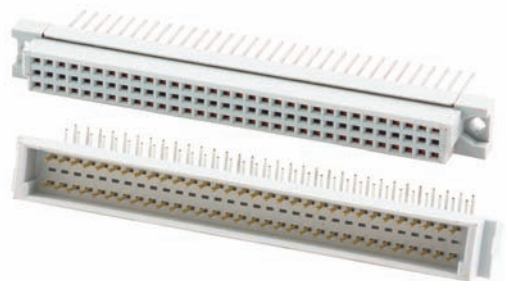

Commonly Ordered Parts:

Pins / Gender	Typ.	Arrangement:	Pintail Length:	Style:	Part No:
16 / Male	C/2	16 a,c (even)	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-2211-11
16 / Female	C/2	16 a,c (even)	5,0 - 4,0 mm	Dip Solder Straight	2810-2213-14
32 / Male	C/2	32 a,c	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-2221-01
32 / Female	C/2	32 a,c	5,0 - 4,0 mm	Dip Solder Straight	2810-2223-04
32 / Male	C	32 a,c (even)	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-0221-11
32 / Female	C	32 a,c (even)	5,0 - 4,0 mm	Dip Solder Straight	2810-0223-14
48 / Male	C/2	48 a,b,c	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-0231-01
48 / Female	C/2	48 a,b,c	5,0 - 4,0 mm	Dip Solder Straight	2810-0233-04
64 / Male	C	64 a,c (even)	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-0241-11
64 / Female	C	64 a,c (even)	5,0 - 4,0 mm	Dip Solder Straight	2810-0243-14
96 / Male	C	96 a,b,c	3,5 - 2,5 mm	Dip Solder 90° Angled	2810-0251-01
96 / Female	C	96 a,b,c	5,0 - 4,0 mm	Dip Solder Straight	2810-0253-04