


## Solder Version

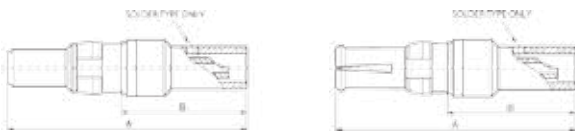

## Coaxial Contacts - 50 / 75 Ohm

Contact Material:	Copper Alloy
Insulator Material:	Teflon
Crimp Sleeve:	PTFE
Other metal parts:	Copper Alloy
Surface Plating:	Inner Contact 1,3µ Au
	Outer Contact 0,8µ Au

	Cable	Plug	Socket	A	B
50Ω	178 B/U, 196 A/U, 404 U	3311-0020-01	3311-0020-11	23.0	11.2
50Ω	174 U, 188 A/U, 316 U	3311-0020-02	3311-0020-12	23.0	11.2
50Ω	180 B/U	3311-0020-03	3311-0020-13	23.0	11.2
50Ω	58 C/U, 141 A/U	3311-0020-04	3311-0020-14	26.8	14.8
50Ω	316 U (Double Braided)	3311-0020-05	3311-0020-15	24.0	12.2
75Ω	179 B/U, 187 A/U (B=7,3)	3311-0020-06	3311-0020-16	19.05	7.3
75Ω	179 B/U, 187 A/U (B=11,2)	3311-0020-07	3311-0020-17	23.0	11.2

## Crimp / Solder Version




	Cable	Plug	Socket	A	B
50Ω	178 B/U, 196 A/U, 404 U	3311-0021-01	3311-0021-11	23.0	11.2
50Ω	174 U, 188 A/U, 316 U	3311-0021-02	3311-0021-12	23.0	11.2
50Ω	180 B/U	3311-0021-03	3311-0021-13	23.0	11.2
50Ω	58 C/U, 141 A/U	3311-0021-04	3311-0021-14	26.8	14.8
75Ω	179 B/U, 187 A/U (B=7,3)	3311-0021-05	3311-0021-15	19.05	7.3
75Ω	179 B/U, 187 A/U (B=11,2)	3311-0021-06	3311-0021-16	23.0	11.2

## 90° Solder / Solder Version



	Cable	Plug	Socket	A	B	C
50Ω	178 B/U, 96 A/U	3311-0024-01	3311-0024-11	18.5	8.2	19.8
50Ω	188 A/U, 316 U	3311-0024-02	3311-0024-12	18.5	8.2	19.8
50Ω	195 A/U, 180 B/U	3311-0024-03	3311-0024-13	18.2	8.2	19.8
50Ω	58 C/U	3311-0024-04	3311-0024-14	18.2	8.2	19.8
75Ω	179 B/U, 187 A/U	3311-0024-05	3311-0024-15	18.5	8.2	19.8

## 90° Crimp / Solder Version

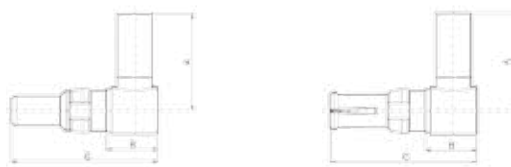

	Cable	Plug	Socket	A	B	C
50Ω	178 B/U, 96 A/U	3311-0025-01	3311-0025-11	18.5	8.2	19.8
50Ω	188 A/U, 316 U	3311-0025-02	3311-0025-12	18.5	8.2	19.8
50Ω	195 A/U, 180 B/U	3311-0025-03	3311-0025-13	18.2	8.2	19.8
50Ω	58 C/U	3311-0025-04	3311-0025-14	18.2	8.2	19.8
75Ω	179 B/U, 187 A/U	3311-0025-05	3311-0025-15	18.5	8.2	19.8