
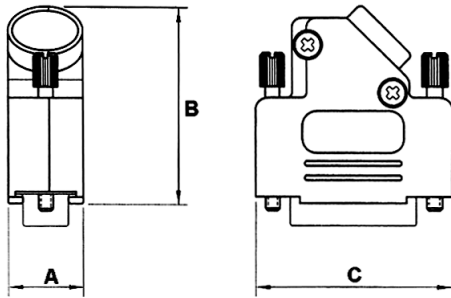


TECHNICAL SPECIFICATIONS

- Material:** UL 94 V-0 Plastic Material
- Operating Temperature:** -55°C to +110°C
- Cable Entry:** Side
- Thumbscrews:** UNC 4-40 (standard)
- Cable Diameter:** Up to 13,0 mm
- Accessories:** See page 120
- Assembly Instruction:** See page 145
- Cable Grommet set:** Four different sizes 4, 5, 7, 9 mm

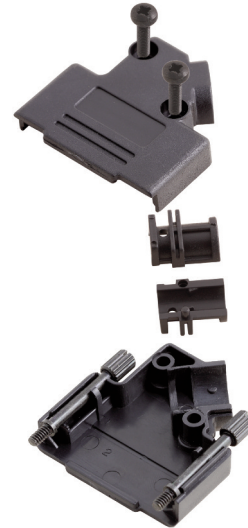

Size MHD45PPK	Dim A	Dim B	Dim C
9-way	15,0	36,3	31,0
15-way	15,0	40,3	39,5
25-way	15,0	40,3	53,2
37-way	15,0	40,3	69,7

Features:

- Available in sizes 9-15-25-37
- Suitable for any common Sub-D connector
- Strain relief inserts ensure a secure termination
- Re-openable
- Also available in Metalized Version, See page 15

Ordering information:

Size:	P/N - Kitted:	Product Code:
9-way	6560-0107-11	MHD45PPK-09-BK-K
15-way	6560-0107-12	MHD45PPK-15-BK-K
25-way	6560-0107-13	MHD45PPK-25-BK-K
37-way	6560-0107-14	MHD45PPK-37-BK-K

Size:	P/N - BULK:	Product Code:
9-way	6561-0107-11	MHD45PPK-09-BK
15-way	6561-0107-12	MHD45PPK-15-BK
25-way	6561-0107-13	MHD45PPK-25-BK
37-way	6561-0107-14	MHD45PPK-37-BK