

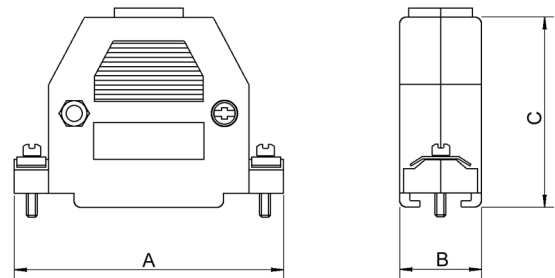


**TECHNICAL SPECIFICATIONS SC-Series**

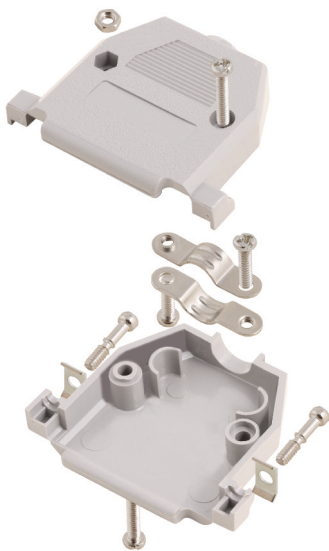

**Material:** UL-Recognised Plastic  
**Operating Temperature:** -55°C to +110°C  
**Cable Entry:** Top  
**Thumbscrews:** UNC 4-40  
**Cable Diameter:** Up to 11,5 mm

- Available with Short or Long Jack Screws
- Available in 9, 15, 25, 37 & 50 Way options
- Available in two colours - Black or Light Grey

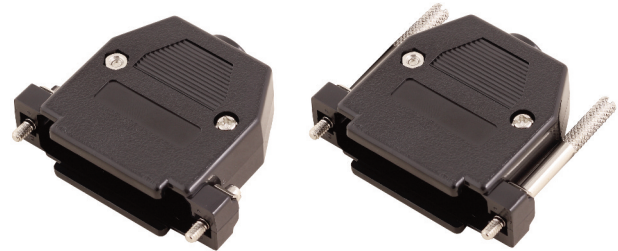

Size	A	B	C
9-way	31,0	16,0	40,2
15-way	39,6	17,4	38,0
25-way	55,0	16,5	44,5
37-way	69,0	24,0	52,5
50-way	69,5	19,5	44,5

**Ordering information - SHORT Jackscrews:**

Size:	P/N - Kitted:	Product Code BLACK:
9-way	2360-0102-01	MHCCOV-09-SC-BK
15-way	2360-0102-02	MHCCOV-15-SC-BK
25-way	2360-0102-03	MHCCOV-25-SC-BK
37-way	2360-0102-04	MHCCOV-37-SC-BK
50-way	2360-0102-05	MHCCOV-50-SC-BK

Size:	P/N - BULK:	Product Code LIGHT GREY:
9-way	2360-0102-11	
15-way	2360-0102-12	
25-way	2360-0102-13	
37-way	2360-0102-14	
50-way	2360-0102-15	

**Ordering information - LONG Jackscrews:**

Size:	P/N - Kitted:	Product Code BLACK:
9-way	2360-0102-21	MHCCOV-09-SCL-BK
15-way	2360-0102-22	MHCCOV-15-SCL-BK
25-way	2360-0102-23	MHCCOV-25-SCL-BK
37-way	2360-0102-24	MHCCOV-37-SCL-BK
50-way	2360-0102-25	MHCCOV-50-SCL-BK

Size:	P/N - BULK:	Product Code LIGHT GREY:
9-way	2360-0102-31	
15-way	2360-0102-32	
25-way	2360-0102-33	
37-way	2360-0102-34	
50-way	2360-0102-35	