


## TECHNICAL SPECIFICATIONS

- Material:** UL 94 V-0 Plastic Material
- Operating Temperature:** -55°C to +110°C
- Cable Entry:** Top
- Thumbscrews:** UNC 4-40
- Cable Diameter:** Up to 13,0 mm
- Accessories:** See page 120
- Assembly Instruction:** See page 145
- Cable Grommet set:** Four different sizes 4, 5, 7 ,9 mm




## Features:

- Available in sizes 9-15-25-37
- Suitable for any common Sub-D Connector
- Strain relief inserts ensure a secure termination
- Re-openable
- Company logo available upon request
- Also available in Unshielded Version, See page 7
- Recyclable

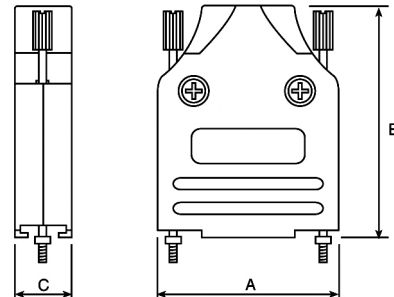

Shielding Effectiveness - MHDTPK-Series

Shielding efficiency

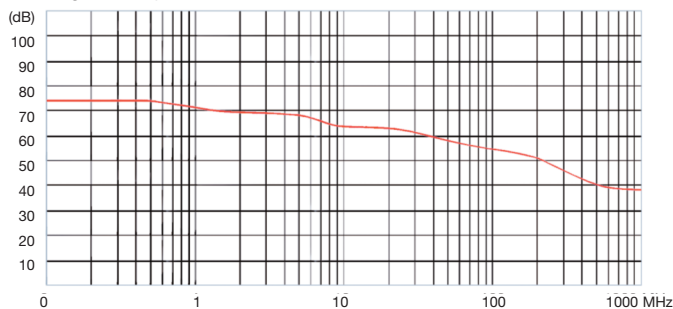

Size MHDTPK	Dim A	Dim B	Dim C
9-way	31,2	39,9	15,0
15-way	39,5	41,5	15,0
25-way	53,4	48,6	15,0
37-way	69,7	53,6	15,0

## Ordering information:

Size:	P/N - Kitted:	Product Code:
9-way	6560-0145-01	MHDTPK-09-K
15-way	6560-0145-02	MHDTPK-15-K
25-way	6560-0145-03	MHDTPK-25-K
37-way	6560-0145-04	MHDTPK-37-K

Size:	P/N - BULK:	Product Code:
9-way	6561-0145-01	MHDTPK-09
15-way	6561-0145-02	MHDTPK-15
25-way	6561-0145-03	MHDTPK-25
37-way	6561-0145-04	MHDTPK-37