



## TECHNICAL SPECIFICATIONS

<b>Material:</b>	UL 94 V-0 Plastic Material
<b>Operating Temperature:</b>	-55°C to +110°C
<b>Cable Entry:</b>	Side
<b>Thumbscrews:</b>	UNC 4-40
<b>Cable Diameter:</b>	Up to 13,0 mm
<b>Accessories:</b>	See page 120
<b>Assembly Instruction:</b>	See page 145
<b>Cable Grommet set:</b>	Four different sizes 4, 5, 7 ,9 mm

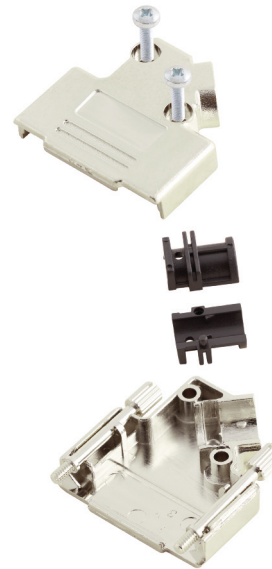


## Features:

- Available in sizes 9-15-25-37
- Suitable for any common Sub-D Connector
- Strain relief inserts ensure a secure termination
- Re-openable
- Company logo available upon request
- Also available in Unshielded Version, See page 8
- Recyclable

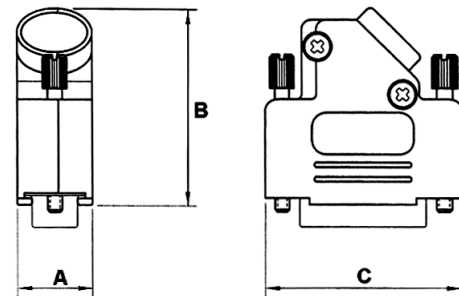

Shielding Effectiveness - MHD45PK-Series

Shielding efficiency

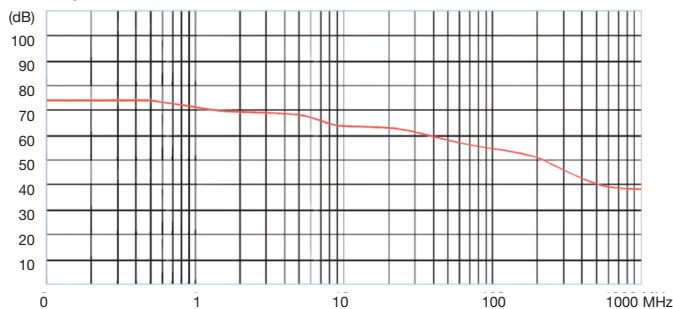

Size MHD45PK	Dim A	Dim B	Dim C
9-way	15,0	36,3	31,0
15-way	15,0	40,3	39,5
25-way	15,0	40,3	53,2
37-way	15,0	40,3	69,7

## Ordering information:

Size:	P/N - Kitted:	Product Code:
9-way	6560-0146-11	MHD45PK-09-K
15-way	6560-0146-12	MHD45PK-15-K
25-way	6560-0146-13	MHD45PK-25-K
37-way	6560-0146-14	MHD45PK-37-K

Size:	P/N - BULK:	Product Code:
9-way	6561-0146-11	MHD45PK-09
15-way	6561-0146-12	MHD45PK-15
25-way	6561-0146-13	MHD45PK-25
37-way	6561-0146-14	MHD45PK-37