



TECHNICAL SPECIFICATIONS

- Material:** Zinc, Nickel plated
- Operating Temperature:** -40°C to +120°C
- Cable Entry:** Top
- Thumbscrews:** UNC 4-40 (standard)
M2,5/M2,6 or M3,0 on request
- Cable Diameter:** From 4,3 mm Up to 13,0 mm
- Screening Test:** SP Swedish National Testing and Research Institute
- Accessories:** See page 120
- Assembly Instructions:** See page 148

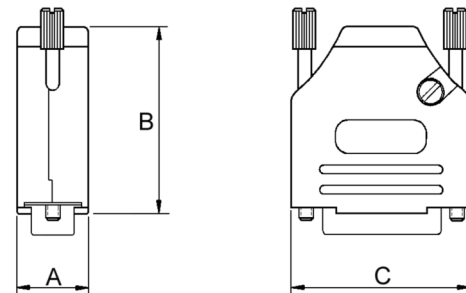

Screening Effectiveness - MHDTZK-Series - Top

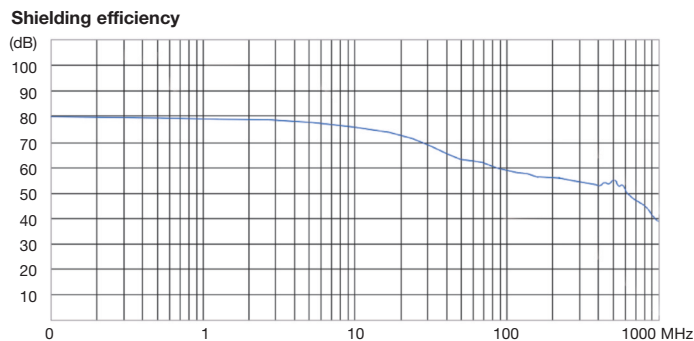

Features:

- Available in sizes 9-15-25-37
- Excellent EMI Shielding
- Re-openable
- Strain relief inserts ensure a secure termination
- Full Metal Jackscrew as standard. Plastic knob on Request.
- Metalized (RAHI) grommets on request. see page 120

Size MHDTZK	Dim A	Dim B	Dim C
9-way	15,0	39,9	31,2
15-way	15,0	41,5	39,5
25-way	15,0	48,6	53,4
37-way	15,0	53,6	69,7

Ordering information:

Size:	P/N - Kitted:	Product Code:
9-way	6560-0805-01	MHDTZK-09-K
15-way	6560-0805-02	MHDTZK-15-K
25-way	6560-0805-03	MHDTZK-25-K
37-way	6560-0805-04	MHDTZK-37-K

Size:	P/N - BULK:	Product Code:
9-way	6561-0805-01	MHDTZK-09
15-way	6561-0805-02	MHDTZK-15
25-way	6561-0805-03	MHDTZK-25
37-way	6561-0805-04	MHDTZK-37