


# DATA SHEET

## MHDB SERIES | SOLDER CUP D-SUB

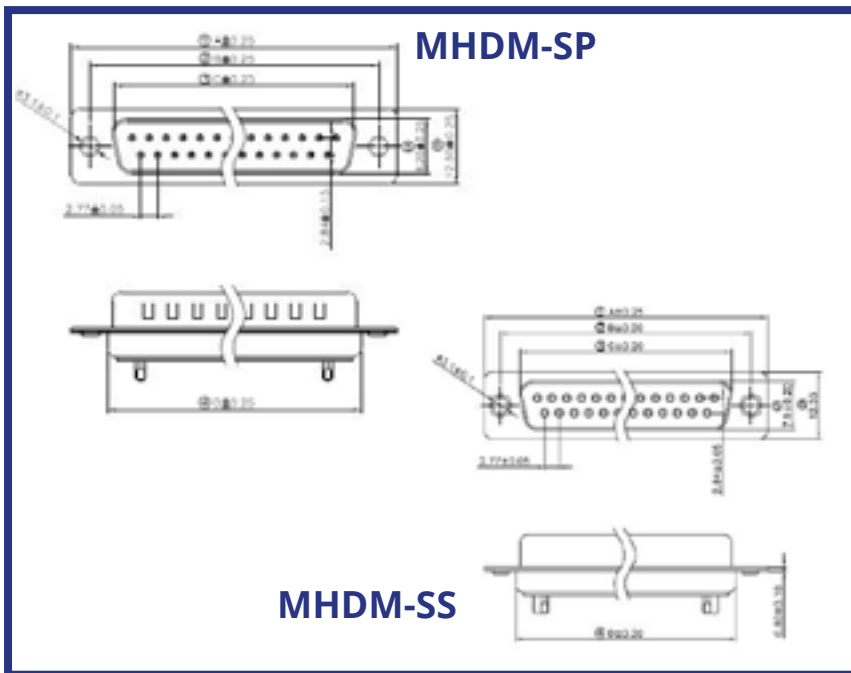

Size (SS)	A	B	C	D
9 Way	30.88	24.88	16.17	18.94
15 Way	39.20	33.30	24.66	27.50
25 Way	53.02	47.04	38.38	41.20
37 Way	69.40	63.50	55.20	57.40

Size (SP)	A	B	C	D
9 Way	30.81	24.99	16.92	19.28
15 Way	39.25	33.32	25.25	27.75
25 Way	53.03	47.04	38.96	41.30
37 Way	69.50	63.50	55.42	57.40

### Technical Specification

Material	Steel, Nickel or Tin plated
Operating Temperature	-55°C to 105°C
Pin Contacts	Brass, Gold plated over nickel
Insulator	PBT glass-fiber reinforced UL 94-V0
Contact resistance	20M Max
Insulation resistance	1000M at 500V DV
Withstand voltage	500V per minute