


# DATA SHEET

## MHDM SERIES | SOLDER CUP D-SUB

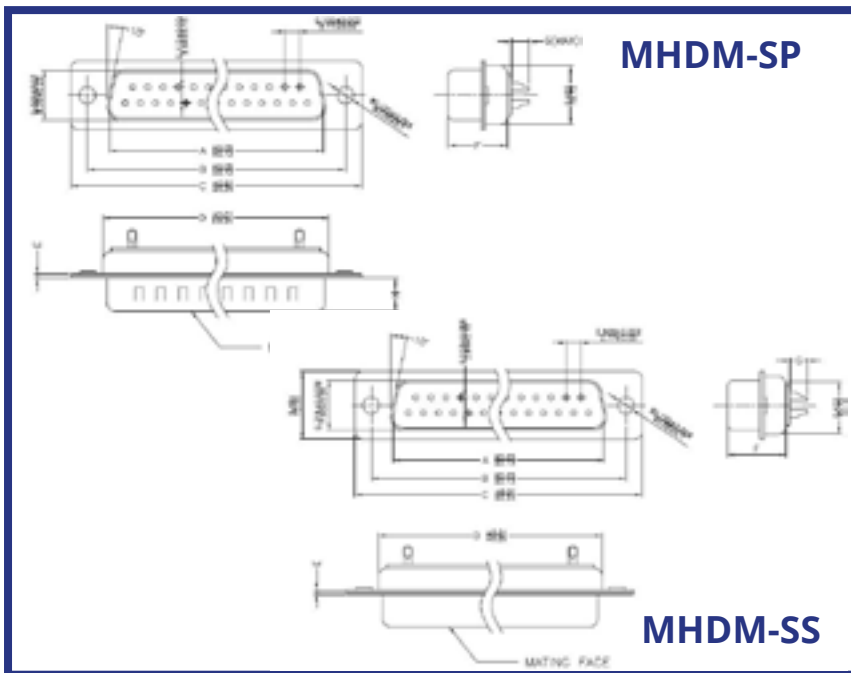

Size (SS)	A	B	C
9 Way	16.33	24.99	30.81
15 Way	24.66	33.32	39.14
25 Way	38.38	47.04	53.04
37 Way	54.84	63.50	69.32
50 Way	52.34	61.11	66.92

Size (SP)	A	B	C
9 Way	16.92	24.99	30.81
15 Way	25.25	33.32	39.14
25 Way	38.96	47.04	53.04
37 Way	55.42	63.50	69.32
50 Way	52.86	61.11	66.92

### Technical Specification

Material	Steel, Nickel or Tin plated
Operating Temperature	-55°C to 105°C
Pin Contacts	Brass, Gold plated over nickel
Insulator	PBT glass-fiber reinforced UL 94-V0
Current Rating	5 Amp
Dielectric Strength	1000V V for one minutue
Insulator Resistance	1000M Min at 500V DC