


TECHNICAL SPECIFICATIONS

- Material:** Zinc, Nickel Plated
- Operating Temperature:** -25°C to +90°C
- Cable Entry:** Side or Top Entry
Flat Cable Entry
- Jackscrews:** UNC 4-40




Side Entry

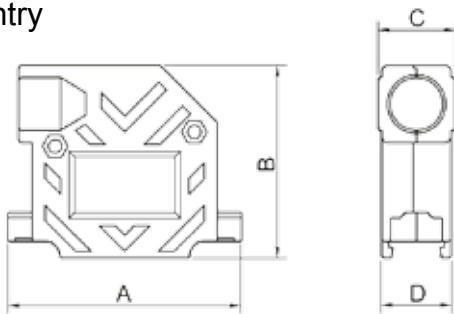

Size	Dim A	Dim B	Dim C	Dim D
25	53,1	43,6	18,0	16,3

Top Entry

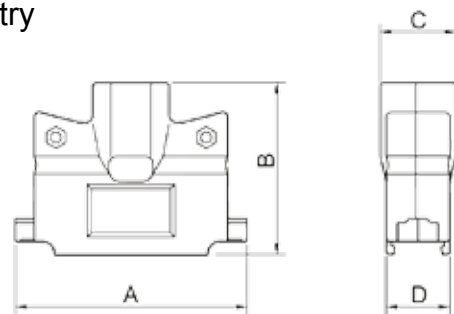

Size	Dim A	Dim B	Dim C	Dim D
9	31,1	37,2	15,7	15,7
15	39,1	40,6	15,7	15,7
25	53,1	39,1	17,5	15,7
37	66,6	45,7	21,9	18,5
50	66,6	45,7	21,9	18,5


Ordering information: *Side Entry*

Size:	P/N - Kitted:	Product Code:
25-way	1060-0206-03	C88E420000

Ordering information: *Top Entry*

Size:	P/N - Kitted:	Product Code:
9-way	1060-0205-01	C88E000209
15-way	1060-0205-02	C88E000211
25-way	1060-0205-03	C88E000204
37-way	1060-0205-04	C88E000210
50-way	1060-0205-05	C88E000212

MHC88E - Flat Cable Entry Hood

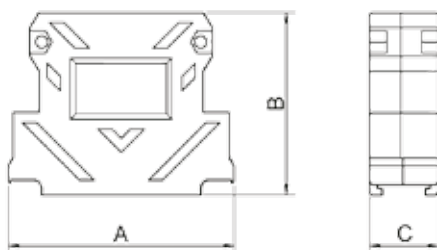

Size:	Dim A	Dim B	Dim C
Flat - 25-way	55,5	45,7	17,5



Ordering information:

Size:	P/N - Kitted:	Product Code:
25-way	1060-0207-03	C88E520000