
THIS IS A C.A.D. GENERATED DRAWING DD NDT MAKE MANUAL REVISIONS TD MASTER.



* UNLESS OTHERWISE SPECIFIED TOLERANCES ON DECIMAL IS: ANGLE X.* $\pm 2^{\circ}$ UNIT: MM X.* $\pm 0.05^{\circ}$ X.X* ± 0.38 X.XX ± 0.25 X.XXX ± 0.13

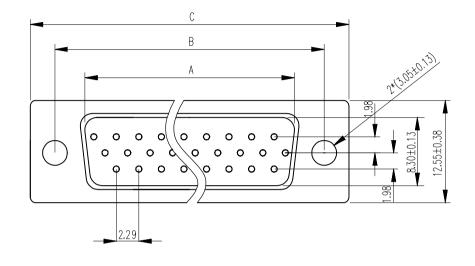

Ordering Info	Dimensions(mm)				
Part Number	SIZE	A±0.25	B±0.13	C±0.38	D±0.25
MHHDBC15-SP	15	16.92	24.99	30.81	19.28
MHHDBC26-SP	26	25.25	33.32	39.14	27.51
MHHDBC44-SP	44	38.96	47.04	53.04	41.28
MHHDBC62-SP	62	55.42	63.50	69.32	57.71

Order Codes:

Plug Connector				
15	2101-0390-01	MHHDBC15-SP		
26	2101-0390-02	MHHDBC26-SP		
44	2101-0390-03	MHHDBC44-SP		
62	2101-0390-04	MHHDBC62-SP		




 SHELL: STEEL MATERIAL, FRONT TIN FINISHED BACK SHELL TIN FINISHED.
INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR.

WRITTEN PERMISSION.	D.
THE MANUFACTURE OR SALE OF APPARATUS WITHOUT	APPROV
BE REPRODUCED. COPIED OR USED AS THE BASIS FOR	
PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT	н.
THESE DRAWINGS AND SPECIFICATIONS ARE THE	DRAWN
	DRAWN

MH CONNECTORS LTD.


RAWN		DATE			
HALEY	11-14-13				
PPROVED		DATE			
DAMIEN		11-15-13			
CALE	SHEET	OF	REV:		
	1 OF	1	5.0		
DRAWING No					
MHHDBCXX-SP					

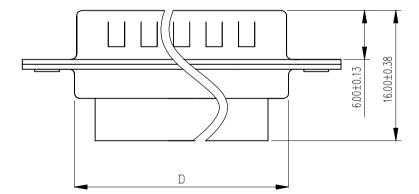

THIS SERIES FULLY CONFORMS TO THE

COMPLIANT

EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.



CONNECTORS

6.00