
THIS IS A C.A.D. GENERATED DRAWING DD NDT MAKE MANUAL REVISIONS TD MASTER.




\* UNLESS OTHERWISE SPECIFIED TOLERANCES ON DECIMAL IS: ANGLE X.\*  $\pm 2^{\circ}$ UNIT: MM X.X\*  $\pm 0.05^{\circ}$ X.X  $\pm 0.38$ X.XX  $\pm 0.25$ X.XXX  $\pm 0.13$ 

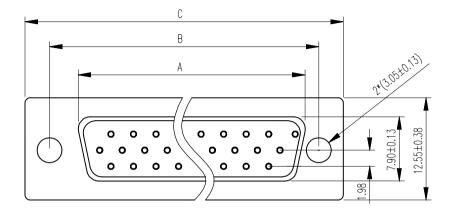


Ordering Info	Di	mensions	s(mm)		
Part Number	SIZE	A±0.25	B±0.13	C±0.38	D±0.25
MHHDBC15-SS	15	16.33	24.99	30.81	19.28
MHHDBC26-SS	26	24.66	33.32	39.14	27.65
MHHDBC44-SS	44	38.38	47.04	53.04	41.30
MHHDBC62-SS	62	54.84	63.50	69.32	57.44

## Order Codes:

Soc	ket Connector	
15	2101-0390-11	MHHDBC15-SS
26	2101-0390-12	MHHDBC26-SS
44	2101-0390-13	MHHDBC44-SS
62	2101-0390-14	MHHDBC62-SS

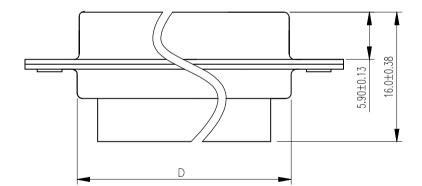



## 1. MATERIALS AND FINISH

 SHELL: STEEL MATERIAL, FRONT TIN FINISHED BACK SHELL TIN FINISHED.
 INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT	DRAWN H
BE REPRODUCED. COPIED OR USED AS THE BASIS FOR	APPRO\
WRITTEN PERMISSION.	D

MH CONNECTORS LTD.

## HALEY 11-14-13 APPROVED DATE DAMIEN 11-15-13 SCALE SHEET OF REV: 1 OF 1 5.0

MHHDBCXX-SS

DATE

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.

COMPLIANT

