
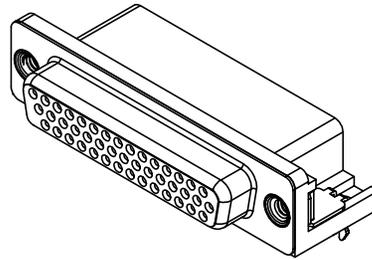
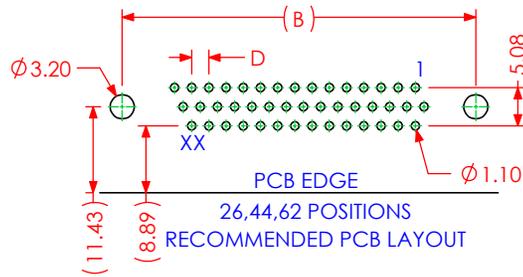


REVISIONS

REV.	DESCRIPTION	DATE	BY
1	ORIGINAL	DRAWN DATE	

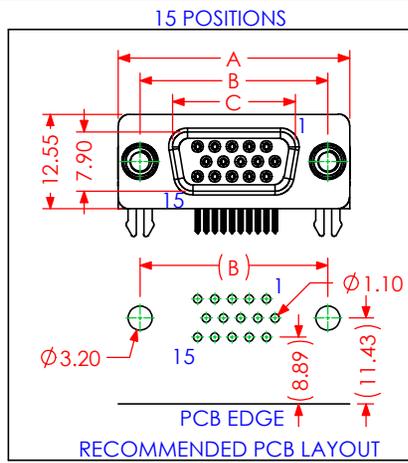

SERIES _____ MHHDR - XX F N S - X 1
 MHHDR - RIGHT-ANGLE P.C.TAIL

POSITIONS _____
 15 - 15 POSITIONS
 26 - 26 POSITIONS
 44 - 44 POSITIONS
 62 - 62 POSITIONS





GENDER _____
 F - FEMALE

SHELL PLATING _____
 N - NICKEL PLATING

CONTACT TYPE _____
 S - STAMPED

HARDWARE OPTIONS _____
 A - #4-40 THREADED HOLE, NI PLATED, BOARDLOCK, TIN PLATED
 B - #4-40 THREADED STANDOFF, NI PLATED, BOARDLOCK, TIN PLATED
 C - #4-40 THREADED HOLE, NI PLATED, L GROUND STRAPS, TIN PLATED

CONTACT PLATING _____
 1 - GOLD FLASH

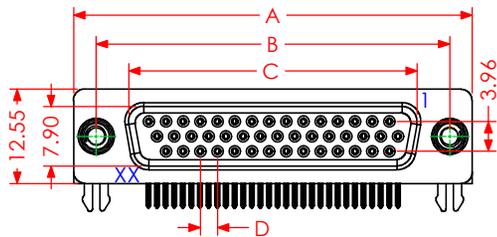

SPECIFICATIONS
 CURRENT RATING: 3A
 WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN
 INSULATION RESISTANCE: 500 MΩ MIN.
 CONTACT RESISTANCE: 30 mΩ MAX.
 TEMPERATURE RANGE: -55°C TO 105°C

INSULATOR MATERIAL: PBT+30% G.F.
 INSULATOR COLOR: BLACK
 SHELL MATERIAL: STEEL
 CONTACT MATERIAL: BRASS
 CONTACT PLATING: GOLD FLASH
 HARDWARE MATERIAL: BRASS

POSITIONS	A	B	C	D
15	30.81	24.99	16.33	2.29
26	39.14	33.32	24.66	2.29
44	53.04	47.04	38.38	2.29
62	69.32	63.50	54.84	2.41



MH CONNECTORS LTD.

RoHS COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC, AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN BY	V.K.	MHHDR SERIES, D-SUB, HIGH DENSITY, RIGHT-ANGLE P.C.TAIL, FEMALE			
DRAWN DATE	11/26/2025				
CHECKED BY	R.S.M.	PART NUMBER	MHHDR-XXFNS-X1		
CHECK DATE	11/27/2025				
TOLERANCES	ALL DIMENSIONS AND TOLERANCES IN MM	MATERIAL	SIZE	A	
.X				±0.30	REVISION
.XX		±0.25	1		OF 1
.XXX	±0.10	SCALE	1:1	SHEET	1 OF 1