
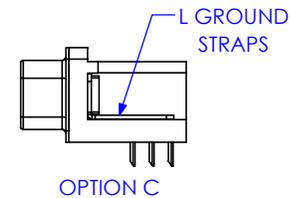



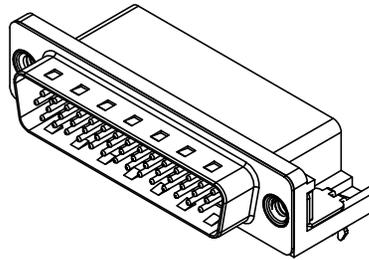
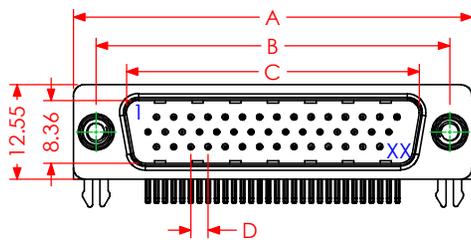
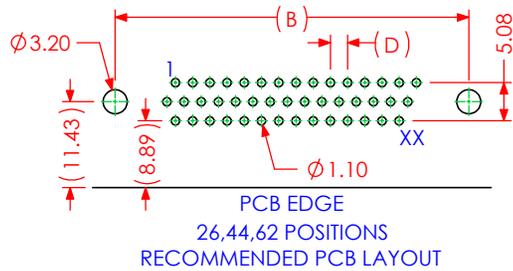


REVISIONS

REV.	DESCRIPTION	DATE	BY
1	ORIGINAL	DRAWN DATE	

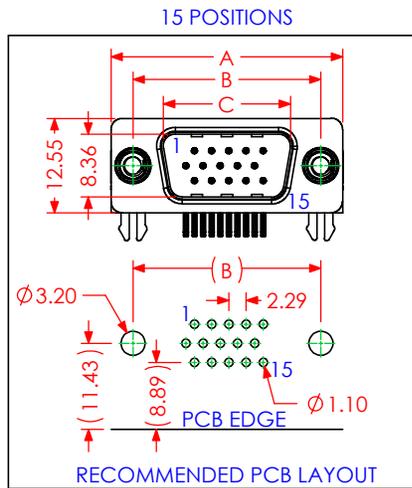

- SERIES _____ MHHDR - XX M N S - X 1
- MHHDR - RIGHT-ANGLE P.C.TAIL
- POSITIONS _____
- 15 - 15 POSITIONS
 - 26 - 26 POSITIONS
 - 44 - 44 POSITIONS
 - 62 - 62 POSITIONS
- GENDER _____
- M - MALE
- SHELL PLATING _____
- N - NICKEL PLATING
- CONTACT TYPE _____
- S - STAMPED
- HARDWARE OPTIONS _____
- A - #4-40 THREADED HOLE, NI PLATED, BOARDLOCK, TIN PLATED
 - B - #4-40 THREADED STANDOFF, NI PLATING, BOARDLOCK, TIN PLATED
 - C - #4-40 THREADED HOLE, NI PLATED, L GROUND STRAPS, TIN PLATED
- CONTACT PLATING _____
- 1 - GOLD FLASH

- SPECIFICATIONS
- CURRENT RATING: 3A
 - WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN
 - INSULATION RESISTANCE: 500 MΩ MIN.
 - CONTACT RESISTANCE: 30 mΩ MAX.
 - TEMPERATURE RANGE: -55°C TO 105°C
- INSULATOR MATERIAL: PBT+30% G.F.
 - INSULATOR COLOR: BLACK
 - SHELL MATERIAL: STEEL
 - CONTACT MATERIAL: BRASS
 - CONTACT PLATING: GOLD FLASH
 - HARDWARE MATERIAL: BRASS

POSITIONS	A	B	C	D
15	30.81	24.99	16.92	2.29
26	39.14	33.32	25.25	2.29
44	53.04	47.04	38.96	2.29
62	69.32	63.50	55.42	2.41



MH CONNECTORS LTD.

RoHS COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC, AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN BY	V.K.	MHHDR SERIES, D-SUB, HIGH DENSITY, RIGHT-ANGLE P.C.TAIL, MALE				
DRAWN DATE	11/28/2025					
CHECKED BY	R.S.M.					
CHECK DATE	11/29/2025	PART NUMBER	MHHDR-XXMNS-X1			
TOLERANCES	ALL DIMENSIONS AND TOLERANCES IN MM	MATERIAL			SIZE	A
.X		±0.30	REVISION			
.XX		±0.25				1
.XXX	±0.10	SCALE	1:1	SHEET	1	OF 1