

DSSK-P Series

Plastic Hood & D-Sub Connector Kit | Stamped & Formed



Description

- Black plastic clip together design
- Quick Snap together locking system
- Re-openable
- Cable entry, side or top entry
- Blanking plug supplied for unused port
- Will accommodate up to 11.5mm diameter cable
- Cable clamp is secured with 2 screws
- 4-40UNC Jackscrews, with plastic caps
- D-Sub connector with stamped contacts, Gold plated contacts, Tin plated solder buckets

The Kit Contains:

Backshell halves	x2
4-40 Jackscrews	
Male or Female Connector with	x1
Solder Buckets	x2
Plastic Strain Relief	x1
Metal Strain Relief Clamp with screws	x1
Plastic Blanking plate	x1


Specification

Hood:


- No Contacts: 9, 15, 25
- Kit Type: D-Sub Connector Kit
- Housing Material: Polyamide UL- Recognised
- Cable Entry: Straight, 90 degree
- Cable OD: Up to 11.5 mm

D-Sub Connector:

- Voltage Rating: 250V
- Current Rating: 3 Amps
- Contact Resistance: 25mA Max
- Insulation Resistance: 1000MΩ
- Operating Temperature: -55°C to 105°C
- Shell: Tin Plated Steel
- Insulator Material: Glass Filled Polyester
- Contact Material: Copper Alloy
- Contact Plating: Selective Gold over Nickel, Solder bucket: Tin plated

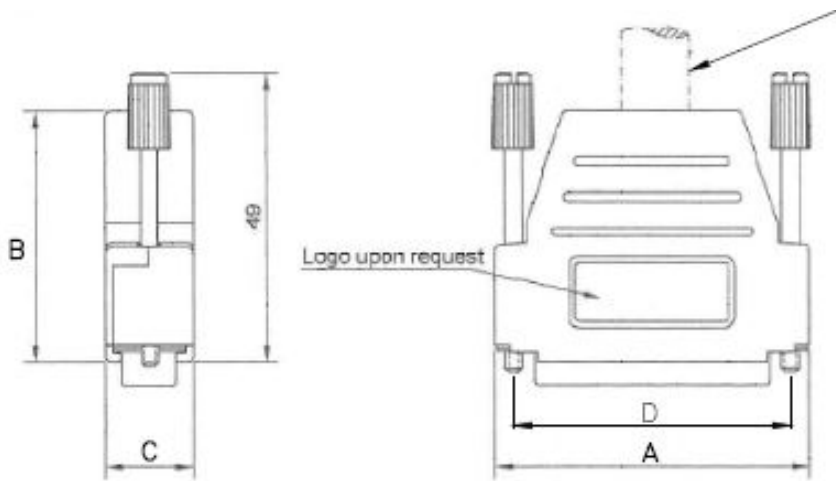

Dimentions					
Size	A	B	C	D	E
09	31.50	24.99	34.00	15.00	8.00
	1.240	0.964	1.339	0.591	0.315
15	40.00	33.32	34.00	15.00	11.50
	1.575	1.312	1.339	0.591	0.453
25	53.50	47.04	40.00	15.00	11.50
	2.106	1.852	1.575	0.591	0.453

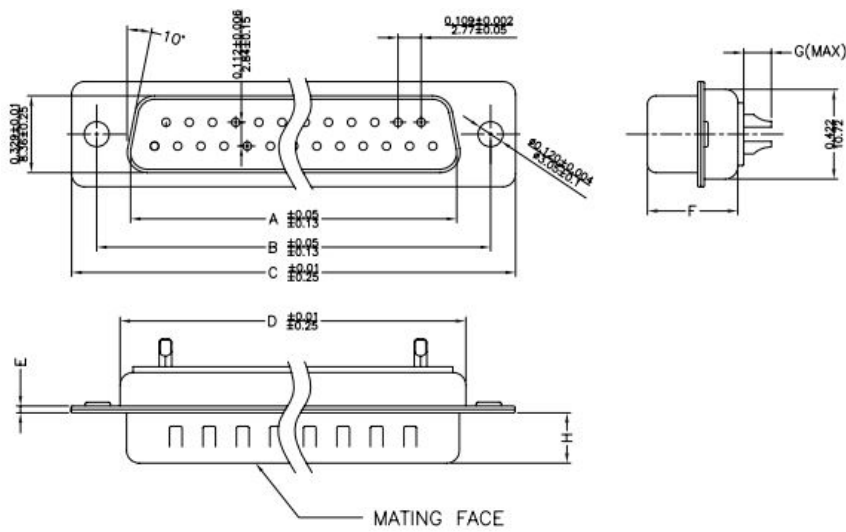

Dimentions			
	09	15	25
A	16.92	25.25	38.96
B	24.99	33.32	47.04
C	30.81	39.14	53.04
D	19.23	27.56	41.30
E	1.0	1.0	1.0
F	10.8	10.8	10.8
G	2.7	2.7	2.7
H	5.84	5.84	5.84

Part No	Positions	Male/Female	Contact Type	Hood Part No	D-Sub Part No
DSSKP9L-DB9P-K	9 Pin	Male	Stamped & Formed	MHDSSK-9-K	MHDB9SP
DSSKP15L-DB15P-K	15 Pin	Male	Stamped & Formed	MHDSSK-15-K	MHDB15SP
DSSKP25L-DB25P-K	25 Pin	Male	Stamped & Formed	MHDSSK-25-K	MHDB15SP
DSSKP9L-DB9S-K	9 Pin	Female	Stamped & Formed	MHDSSK-9-K	MHDB9SS
DSSKP15L-DB15S-K	15 Pin	Female	Stamped & Formed	MHDSSK-15-K	MHDB15SS
DSSKP25L-DB25S-K	25 Pin	Female	Stamped & Formed	MHDSSK-25-K	MHDB15SS